

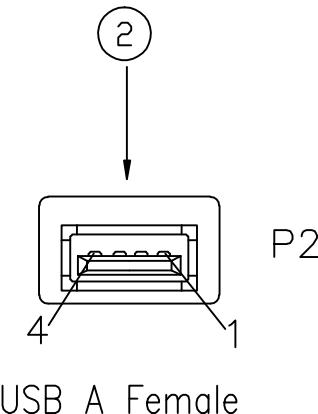


MD 6 Male

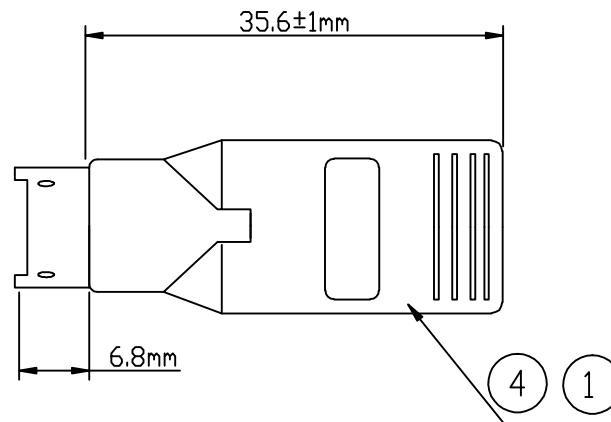

USB A Female

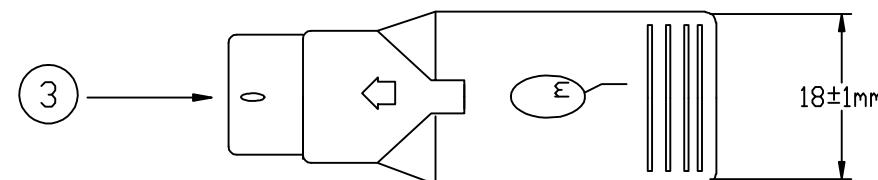

ELECTRICAL PROPERTIES:


- 1 Contact Resistance: 30mΩ MAX
- 2 Insulation Resistance: 5Mega ohm MIN
- 3 Hi-Pot: 300V DC/10ms

| | | |
|-----|-------------------------|------|
| (4) | PVC 45P Black | 9 |
| (3) | MD 6P MALE,CONTACT | 1 |
| (2) | USB A FEMALE,CONTACT | 1 |
| (1) | JUMP WIRE: 30AWG L=25mm | 4 |
| NO. | DESCRIPTION | Q'TY |

PIN ASSIGNMENT

P1

P2

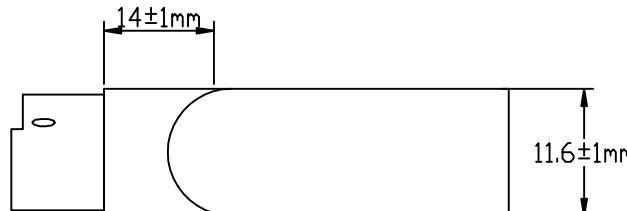

| | | |
|---|-------|---|
| 4 | ----- | 1 |
| 1 | ----- | 2 |
| 5 | ----- | 3 |
| 3 | ----- | 4 |

| | | | | |
|----|----|-----------|-----|--------------------------------------|
| 比例 | | 日期 | 文件号 | DF-JS-14021711-1 |
| 设计 | | | | |
| 制图 | 叶飞 | 2014/2/17 | | 02-5311 |
| 校对 | | | | |
| 批准 | | | | |
| 材料 | | | | WUJIN MIQI EAST ELECTRONIC CO., LTD. |